




OVERLAMINATE SELECTION GUIDE

	OVERLAMINATE	BENEFITS	THICKNESS	FINISH
RECOMMENDED OVERLAMINATE	SERIES 3210	<ul style="list-style-type: none"> + Recommended for applications under 20°C + Ideal for vehicles with compound curves + Better cold stretch capacity + Best for UV inks 	35 microns (1.3-Mil)	Gloss
COMPATIBLE OVERLAMINATE	SERIES 3220	<ul style="list-style-type: none"> + Pliable and stable through all seasons and across all print platforms + Good cold stretch capacity + Widest range of finishes + Versatile overlaminate to simplify inventory 	50 microns (2-mil)	Gloss Luster Satin Matte
COMPATIBLE OVERLAMINATE	SERIES 3270	<ul style="list-style-type: none"> + Best for solvent or latex prints and high ink saturation + Maximize the use of FLITE Technology® + Engineered to increase overall stability providing greater efficiency when installing large panels + Recommended for applications over 30°C 	50 microns (2-mil)	Gloss Satin Matte
COMPATIBLE OVERLAMINATE	SERIES 3310	<ul style="list-style-type: none"> + PVC-free film + Durability rated up to 10 years for vertical exposure and up to 4 years for horizontal exposure (zone 1) + Best cold stretch capacity + Similar application feel to Series 3210 	38 microns (1.5-Mil)	Gloss

OPTIMAL APPLICATION TEMPERATURE RANGE

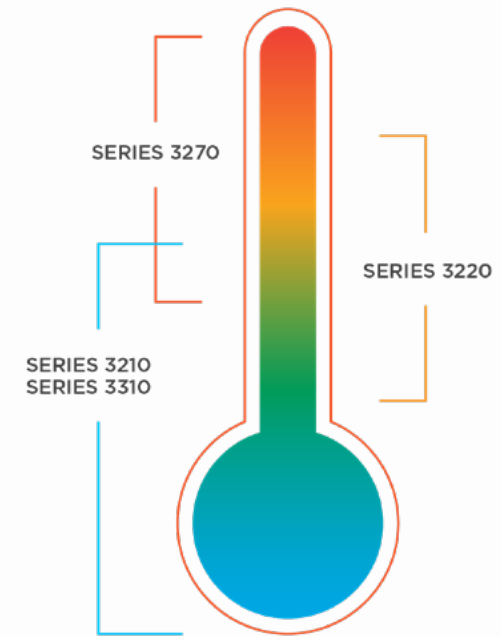

Overlaminates are used to enhance the appearance and durability of your graphics. When choosing an overlaminate for SLX[®]+, consider your customer's needs and the application benefits of each Arlon overlaminate to make your selection easy.